


Product Catalogue

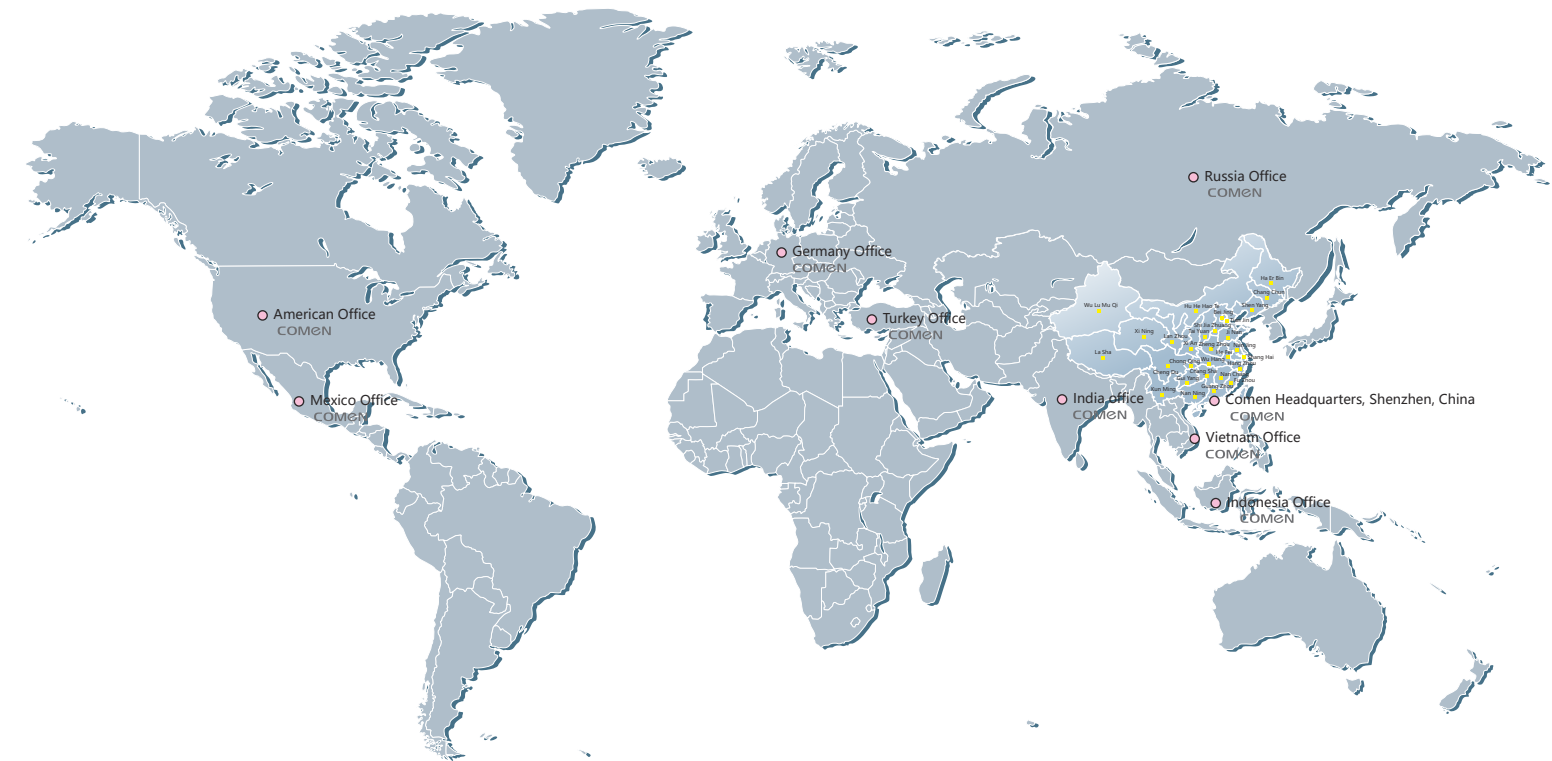

Comprehensive Patient Monitoring System

Comprehensive NICU Solution

Comprehensive OR/ICU Solution



Shenzhen Comen Medical Instruments Co., Ltd.

Add: Floor 10, Floor 11 and Section C of Floor 12 of Building 1A & Floor 1 to Floor 5
of Building 2, FIYTA Timepiece Building, Nanhuan Avenue, Matian Sub-district,
Guangming District, Shenzhen, Guangdong, 518106, P.R. China
Tel: +86-755-2640 8879 Fax: +86-755-2643 1232 Website: en.comen.com E-mail: info@szcomen.com

P/N: EN-Product Catalogue-80P-20211125-V1.5

COMEN

Contents

01 Comprehensive Patient Monitoring System

- 02 Patient Monitoring
- 19 Central Monitoring System
- 20 Obstetric Monitoring
- 22 Electrocardiograph
- 24 CVAD Guiding system
- 26 Sequential Compression System

28 Comprehensive NICU Solution

- 30 Neonatal Incubator & Thermoregulation
- 36 Jaundice Treatment
- 38 Temperature control system
- 40 Neonatal Respiratory Support

44 Comprehensive OR/ICU Solution

- 46 Defibrillator Monitor
- 48 Ventilator
- 52 High Flow Heated Respiratory Humidifier
- 54 Video Laryngoscope
- 56 Anesthesia Machine
- 62 Surgical Products
- 72 Infusion System
- 76 Smart OR

Comprehensive Patient Monitoring System



C100 Specialized Cardiovascular Monitor

≥ Modular Monitor + ECG



Modular Monitor

C100 can be used as a electrocardiograph

C100 has passed IEC 60601-2-25 ECG Machine Specialized Standards.
Advanced performance: Input impedance ≥ 50MΩ,
Polarization resistance voltage: ≥ ±650mV,
Common mode rejection ratio: ≥ 105dB, Time constant: ≥ 5S.
72 hours' full disclosure 12-lead ECG waveform review.
Shortcut key for ECG, one key switch between the monitoring mode and the ECG mode.
216mm modular printer; synchronous printing of 12-lead ECG.

Functional modular slot X 2

Two extendable modular slots,
CO2 / IBP / C.O. / AG / ICG module optional;
Flexible configuration based on
department requirements.

Printing module slot X 1

Support 216mm thermal recorder,
12 waveforms simultaneously recorded.



2 Transfer patients to the hospital



3 Transfer patients in the hospital



4 Monitoring in emergency department

1 First-aid on the spot



C30 Multi-parameter Patient Monitor


Comen C30 is a new generation of specialized ambulance & transport monitor. It is designed according to rescuing scene and ambulance transportation monitoring requirements for practicability, convenience and reliability of emergency treatment, first aid and transportation. It adopts PC/ABS high-strength engineering plastics, high-reliability Linux operation system and high-brightness scratching-prevention LCD. It is equipped with specialized first-aid monitor bag with fitting management pack and first aid device collection pack able for multi-carry. The entire machine is portable, solid, reliable, stable, waterproof, fireproof and anti-falling. It also can be displayed clearly under strong sunshine in the open air. It also can be used under various kinds of severe environment to meet the demand of medical agents such as troops and hospital during emergency treatment, first aid and transportation in the field.



- Waterproof, vibration shock resistant
- The specialized waterproof and anti-shock C30 first aid bag is portable and easy carrying with enough space
- Multi-carry options: shoulder strap, stretcher, mount on the ambulance
- Place first aid articles in left storage bag and all instrument accessories fitted in right one



C60 Specialized Neonatal Monitor

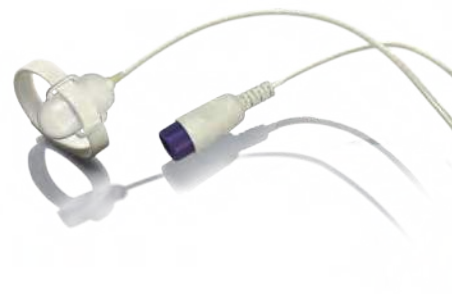

Apnea Self-saving monitoring

Unique neonatal Apnea Self-saving monitoring solves the suffocation symptom brought by Apnea neonatorum, gives superior care to the neonates.



Oxygen concentration monitoring function

The oxygen concentration of the incubator will be displayed on the monitor through oxygen sensor, it's convenient for caregivers to know the oxygen concentration status.



C20

Specialized Fetal & Maternal Monitor

In obstetrics, we take care of both fetus and pregnant women. Different monitors will be used during the process of prenatal diagnosis, premature rescue, delivery, postpartum recovery. Traditional obstetric care equipment, including fetal monitor, emergency transport monitor, maternal / fetal monitor and multi parameter monitor, makes monitoring complicated. However, COMEN makes it simple and creates the C20 specialized obstetric monitor. C20 provides a variety of obstetric care equipment which can meet all the demands in obstetrics.

Functional Characteristics

- 12.1" LCD touch screen
- Full keyboard design makes clinical editing more easily
- Screen can be adjusted for multi-angle observation
- Suitable for antepartum and postpartum applications
- Fetal interface, fetal and maternal interface, big font interface
- High sensitive waterproof FHR transducer
- Auto/Manual fetal movement marker
- Automatic fetal status scoring system
- Built-in 152mm Thermal Printer
- Compatible with COMEN central monitoring system

Professional fetal automatic scoring system

NST

Fischer

Improved Fischer

Krebs

C90 Multi-parameter Patient Monitor

C90 monitor is integrated with the world-leading vital signs parameter monitoring technology and IT application technology to make a high-end vital signs monitoring platform and provide a comprehensive monitoring solution.

- 17" high resolution LCD touch screen 1280 X 1024
- Rotary knob, buttons and touch screen operation.
- Built-in lithium battery: to ensure keeping continuity of patient' s data during operation with its running time over 2 hours
- Bracket solutions: Trolley
- Supporting built-in thermal printer and external laser printer
- Module conductive contact: gold-plating technology, excellent conductivity
- Infrared transmission for module data transfer



C70 Multi-parameter Patient Monitor

Classic Continuation
Continuous Innovation

C70 inherited the outstanding character of our Patient Monitor C90 and adopted with highly integrated modular mechanical structure, it efficiently combines the structure, function and maintainance management. C70' s single-module and multi-module can combinate at meeting the upgrade which clinical needs. C70 create a new era in modular monitor field.



Functional module slot

Plug and play, interchangeable
Various kinds of module slots, multi parameter module C30 and multi parameter module C31 can be plugged in C90 and C70, which provided the vital signs parameter monitoring.



IBP



CO₂



AG



ICG



C.O.



BIS

K Pro series

Modular Patient Monitor




Designed for Critical Care.

During covid-19, the critical care demand is immense in hospitals, especially for patient monitoring. By meeting these challenges today, we have launched the advanced monitoring solution K Pro series and aim to provide better care for the patient.



Crystal Clear Monitoring with Comen's High-end K Pro Series.

- Our refined capacitive screens come installed with multiple user-friendly designs to facilitate operations in most clinical settings.
- Bundled with even more high-end monitoring parameters including NMT, Masimo Rainbow Set, rSO₂, apnea wake-up and O₂, the K Pro Series provides more tools for diagnostic accuracy.
- The K18 Pro is equipped with a dual system which incorporates a patient monitoring system with an iCM system that is developed based on Windows®, which allows clinicians to have direct access to hospital databases on the monitor such as HIS, EMR and PACS as well as doubling as a bedside workstation.
- The K Pro Series can also be connected to other clinical equipment such as anesthesia machines, ventilators and infusion & syringe pumps, to integrate and display comprehensive patient data, thus creating a one-stop monitoring platform that is furthered by the inclusion of centralized monitoring and multiple functions for the processing of physiological parameters during critical patient care.

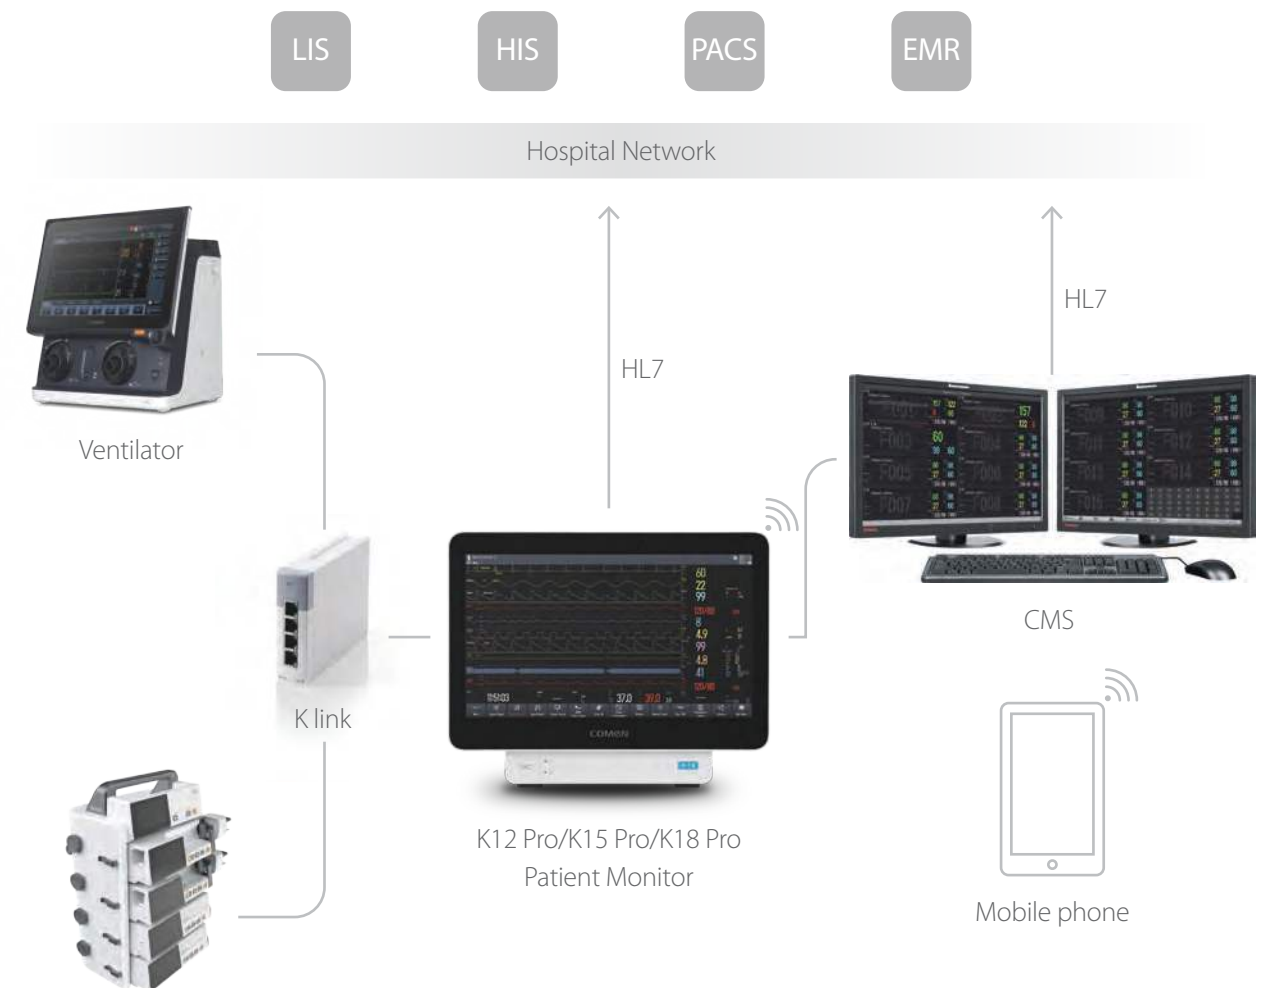

K1 Specialized Transport Patient Monitor



Concise, Intuitive, Powerful

- Compact size 148.4×79.2×96.5mm, Light weight 2.5kg
- Fixed handle and modular rack, carry with ease
- 5.5-inch capacitive touchscreen 1280×720 high resolution
- Supports multi-touch operation, easy to learn and operate
- IP44 Ingress Protection, 1.2m Drop Endurance and 10-hour Battery Life



Seamless Functionality that Moves, Just Dock It.

- With the certification of EN1789, the K1 can be used as a specialized ambulatory transport patient monitor.
- Couples as plug-and-play multi-parameter module for the K Pro Series patient monitors to achieve seamless transmission of patient data from transport straight to the ICU.
- Compact and Flexible, the K1 also functions perfectly as a bedside patient monitor when equipped with a module rack and docking station that enables connection to an external display through mirrored or independent modes.



Diagnostic Excellence through Reliability and Versatility

- K1 delivers basis measurements including 3/5/6/12-lead ECG with ST and QT analysis, respiration, NIBP, SpO2, temperature, built-in sidestream EtCO2 and dual IBP.
- With modular rack, K1 supports one extended module and provides advanced measurements including mainstream/sidestream EtCO2, dual IBP, invasive cardiac output(C.O.), BIS, AG, NMT, RM, Rainbow SpO2 and apnea wake-up function for infants.
- Alarm Event 2000 groups, NIBP 2000 groups, ARR Event 48 hours, Full Disclosure 48 hours, Trend Graph/Table 160 hours.
- Clinical Assistant Application(CAA) including Early Warning Score (EWS), Glasgow Coma Scale (GCS), SpesisSight and 24 hours ECG summary.
- 4G/5G/WIFI/wired connection to central monitoring system on the move or at the bedside. Seamless and offline data transmission to K Pro Series when working as a module.



C80
Multi-parameter Patient Monitor
12.1" LCD touch screen



C86
Multi-parameter Patient Monitor
15" LCD touch screen

C80/C86 is the new generation of patient monitor designed and developed by COMEN. C80/C86 is equipped with SD card port, USB port, convenient handle, multiple mounting solutions, IPX1 level waterproof cabinet design and sturdy housing to withstand rough handling. C80/C86 fulfills the hardware requirements for intensive care monitoring in multiple environments, efficiently caring for human life every second.



C50
Multi-parameter Patient Monitor

Features:

- 10.4" LCD touch screen
- Support rotary knob, buttons and touch screen operation
- Perfect patient information management system
- 5° inclination screen makes bedside monitoring easier
- Fan-less design, avoid cross contamination on laminar, ultra quiet;
- IPX1 waterproof
- Intelligent alarm technique, automatic recognition alarm level

C100A
Multi-parameter Patient Monitor

COMEN Telemetry Monitoring System

- RF telemetry technology.
- Support 3,5 lead ECG.
- Maximum 48 telemetrys can be connected to Central Monitoring System.



NC3
Vital Signs Monitor

Specially designed for inpatient monitoring and ward rounding, easy and quick to learn basic vital signs; Configured with easy-to-use NIBP, SpO2 functions; Quick body temperature measurement technique in clinical application: use infrared ear thermometer to learn ear cavity temperature in 1-2s, which is uploaded wirelessly to NC3; 12 hours battery life under standby mode, high resolution display; Simple and elegant, compact and lightweight; Aesthetics, technology, science and wisdom in one.



NC5
Vital Signs Monitor

Ingenious and Minimalistic, Smart and Lightweight

Applied to outpatient, emergency and general wards. As a spot check monitor and bed side monitor, it integrates NIBP, SpO2, ECG, Ear Temp. It is simple, tasteful, compact and lightweight, a perfect combination of technology and aesthetics.

NC 12

Screen Size : 12.1 inch



NC 8

Screen Size : 8 inch



NC 10

Screen Size : 10.4 inch



NC19 Multi-parameter Patient Monitor

Screen Size : 19 inch

Multi-parameter Patient Monitor

Simple, reliable, multi-functional.

Semi modular patient monitor, combined the advantages of normal patient monitor and modular patient monitor, which can meet different demand of different department in hospital.

Support rotary knob, buttons and touch screen operation.

Plug and play modular design offers the most commonly used parameters, including CO₂, IBP, AG, C.O., BIS.

Screen brightness auto-adjustment with ambient light sensor.

Button bar was located at right side on the front shell, more convenient for using.

Fan-less design, avoid cross contamination on laminar, ultra quiet.

NC19 is a standard display interface which integrated both hardware and software technology from its mature product C90 & C70. Not only with slim and wide LCD screen, but also capacity with powerful information processing. This product equips with various peripheral interface, which is suitable for working with different equipment. Relying on a variety of mounting solutions, developing with innovative technology, COMEN perfectly combines actual medical applications and modern aesthetics into one, which comes as Separated Modular Patient Monitor NC19.

This innovative monitoring applies with the comprehensive care units; Integrate with patient monitor C30 . It is very convenient for nurses to observe the data with 19 inch LCD screen, and also the modular patient monitor is a classic model for the ICU.



STAR8000F

Multi-parameter Patient Monitor

Features:

- 12.1" LED backlight touch screen with low power consumption
- Support rotary knob, buttons and touch screen operation
- Fan-less design, avoid cross contamination on laminar, ultra quiet
- Large data storage
- Large capacity battery, incredible long service life



STAR8000E

Multi-parameter Patient Monitor

Features:

- 12.1" LED backlight screen with low power consumption
- Support rotary knob, buttons and touch screen operation
- Fan-less design, avoid cross contamination on laminar, ultra quiet
- Large data storage
- Large capacity battery, incredible long service life
- Independent striking NIBP shortcut key, easy to use



STAR8000H

Multi-parameter Patient Monitor


Features:

- 8.4" LED backlight touch screen
- Support rotate, key and touch screen operation
- Fan-less design, avoid cross contamination on laminar, supreme quiet
- Pass CE certificate, modular design with magnesium alloy guarantee safety, reliability and stability
- Light weight with compact design, multiple mounting solutions, easy to transport and mount

STAR8800

Central Monitoring System Software

Monitoring system consisted of varies of specialized monitors

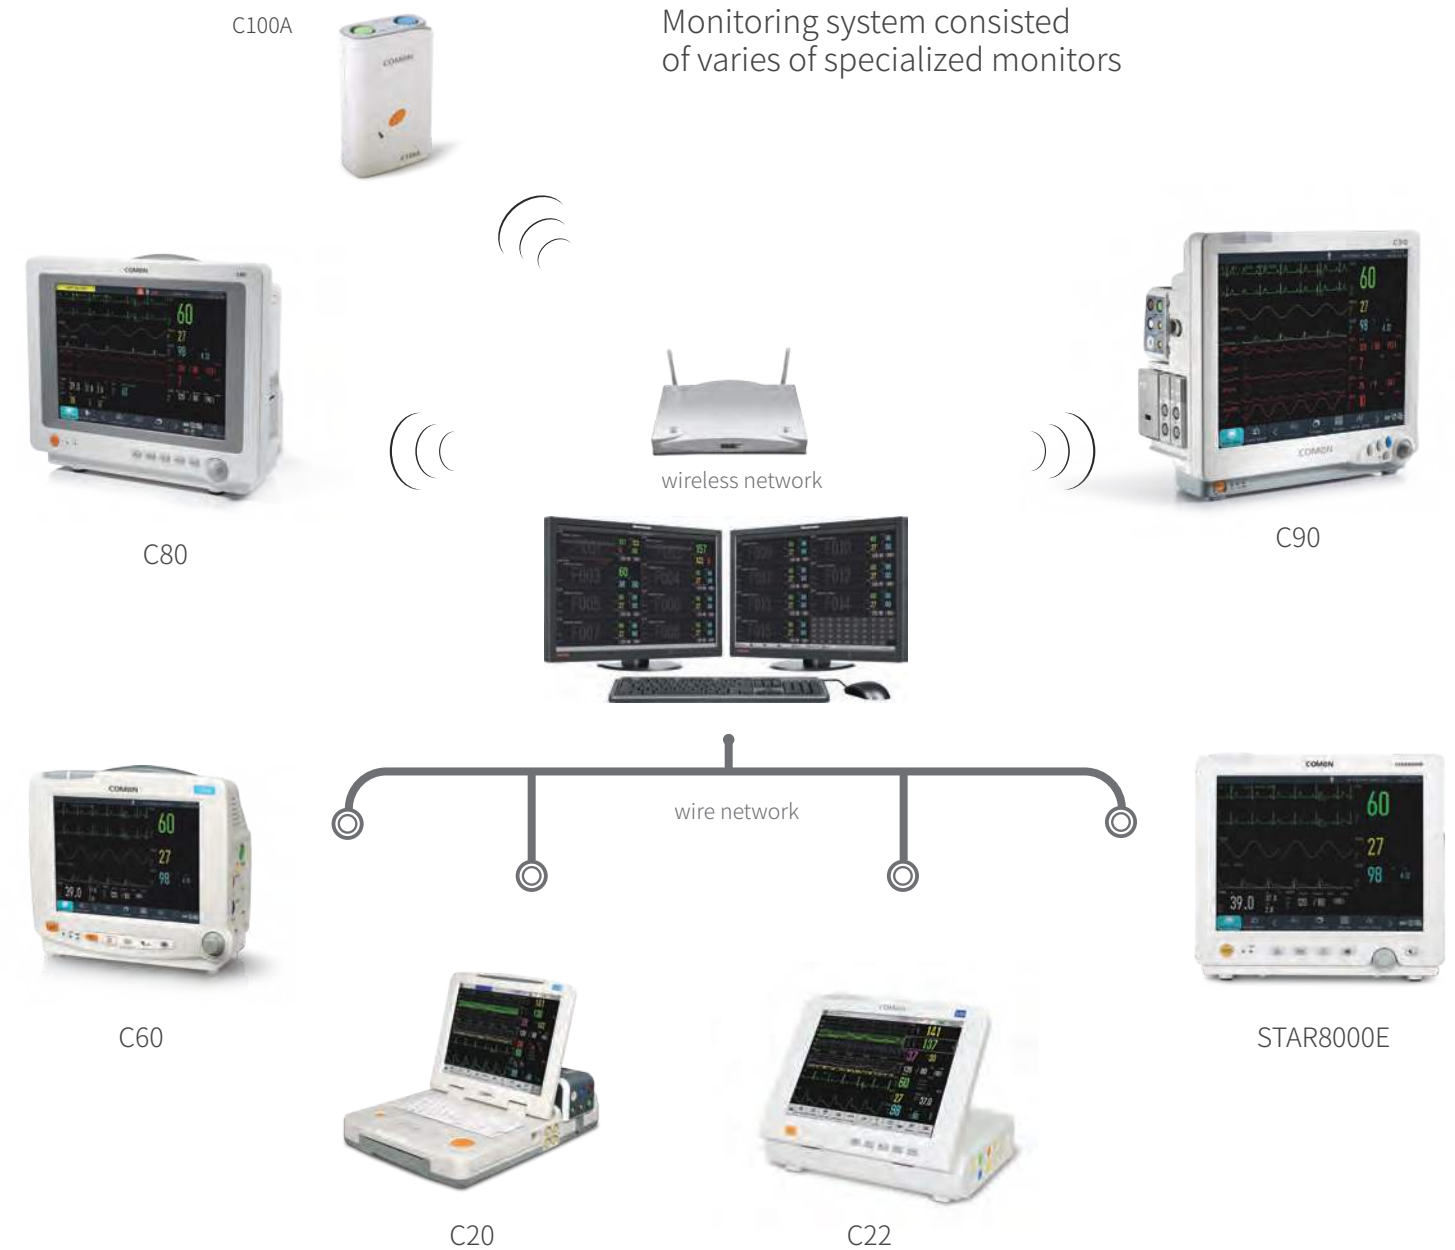



C21

Specialized Fetal Monitor

Features:

- 12.1" LCD touch screen
- Screen can be adjusted for multi-angle observation
- Standard, big font, parameter list interfaces
- High sensitive waterproof FHR transducer
- Built-in 152mm Thermal Printer
- 120 hours full data review
- Auto/manual fetal movement marker
- Automatic fetal status scoring system: NST, FISCHER, IMPROVED FISCHER, KREBS

C22

Specialized Fetal & Maternal Monitor

Features:

- 12.1" LCD touch screen
- Screen can be adjusted for multi-angle observation
- Suitable for antepartum and postpartum applications
- Fetal interface, fetal and maternal interface, big font interface
- High sensitive waterproof FHR transducer
- Auto/Manual fetal movement marker
- Built-in 152mm Thermal Printer
- Compatible with COMEN central monitoring system
- Automatic fetal status scoring system: NST, FISCHER, IMPROVED FISCHER, KREBS



STAR5000E

Fetal Monitor

Features:

- 5.7" screen
- Built-in 112mm thermal printer
- Quick release button for paper replacement
- Built-in Lithium-ion battery, up to 4 hours
- Auto/manual fetal movement marker
- Automatic fetal status scoring system
- FHR signal strength indicator, twins cross channel v.
- Power-off data protection for 300 cases.
- 60 hours real-time waveform replay & storage
- Timing monitoring function to avoid over time monitoring
- Support timing printing
- Compatible with COMEN central monitoring system





H12 Electrocardiograph

- 10.4 LCD touch screen
- 12×1, 6×2 format display, vertical screen display
Support handwriting input
- 10000 patient case storage, support JPG format storage
- FTP / DICOM protocol allow connection with hospital
- HIS, EMR, PACS system without PC workstation



H3 Electrocardiograph

- 6.2" LCD touch screen
- Screen brightness auto-adjustment with ambient light sensor
- 3×4 and 6×2 display format, 12-lead display simultaneously
- 10000 patient case storage, support JPG format storage
- FTP service allows patient case download in a remote network

CM1200

Electrocardiograph

Features:

- 12.1" folding-up touch screen
- Support multi-language, printing preview
- Sleep/wake up mode for saving energy and extending screen life
- Lead status display
- Alphanumeric keyboard, support hand-writing patient information input
- Anti-defibrillation
- 10,000 ECG internal memory
- Last 120 seconds 12-lead waveforms reviewable and recordable
- 216/210mm thermal printer, support rolling paper, and Z-fold paper
- External printer and data transmission support by USB port
- Optional ECG working station



CM1200A

Electrocardiograph

Features:

- 8.4 inch LED touch screen
- Alphanumeric keyboard and hidden handle
- Lead status display
- Manual/ Auto/ Rhythm working modes selectable
- Support 4 hours working time
- 300 ECG internal memory
- 210mm, 216mm roll and Z-folded paper for options
- Net-grid on screen for easier observation



CM1200B

Electrocardiograph

Features:

- 5.7" Screen
- Lead status display
- Numeric keyboard, backlight design for night use
- 300 ECG internal memory
- 120 seconds 12-lead waveforms reviewable and recordable
- Support 210mm rolling paper, Z-folded paper
- External printer and data transmission support by USB port
- Optional ECG working station
- Basic economic model



U8


Catheter-positioning Guiding System

Create a CVAD puncture whole-process solution




CVAD operating platform integrating ultrasound and ECG positioning

CVAD (central vascular access device) is a catheterization technique in which a catheter is inserted through a peripheral vein and the tip of the catheter is placed in the SVC (superior vena cava) or IVC (inferior vena cava). It includes PICC (peripherally inserted central catheter) and CVC (central venous catheterization) PORT. It is mainly used for measuring CVP (central venous pressure), chemotherapy, parenteral nutrition pathway, and administration of high-risk medication (hypertonic, high-acidic and high-alkaline).



Vessel localization and evaluation




Diagnosis of the ectopic catheter



The positioning of the catheter end

In response to the above problems, Comen U8 proposes a CVAD puncture solution.

CVAD Solution

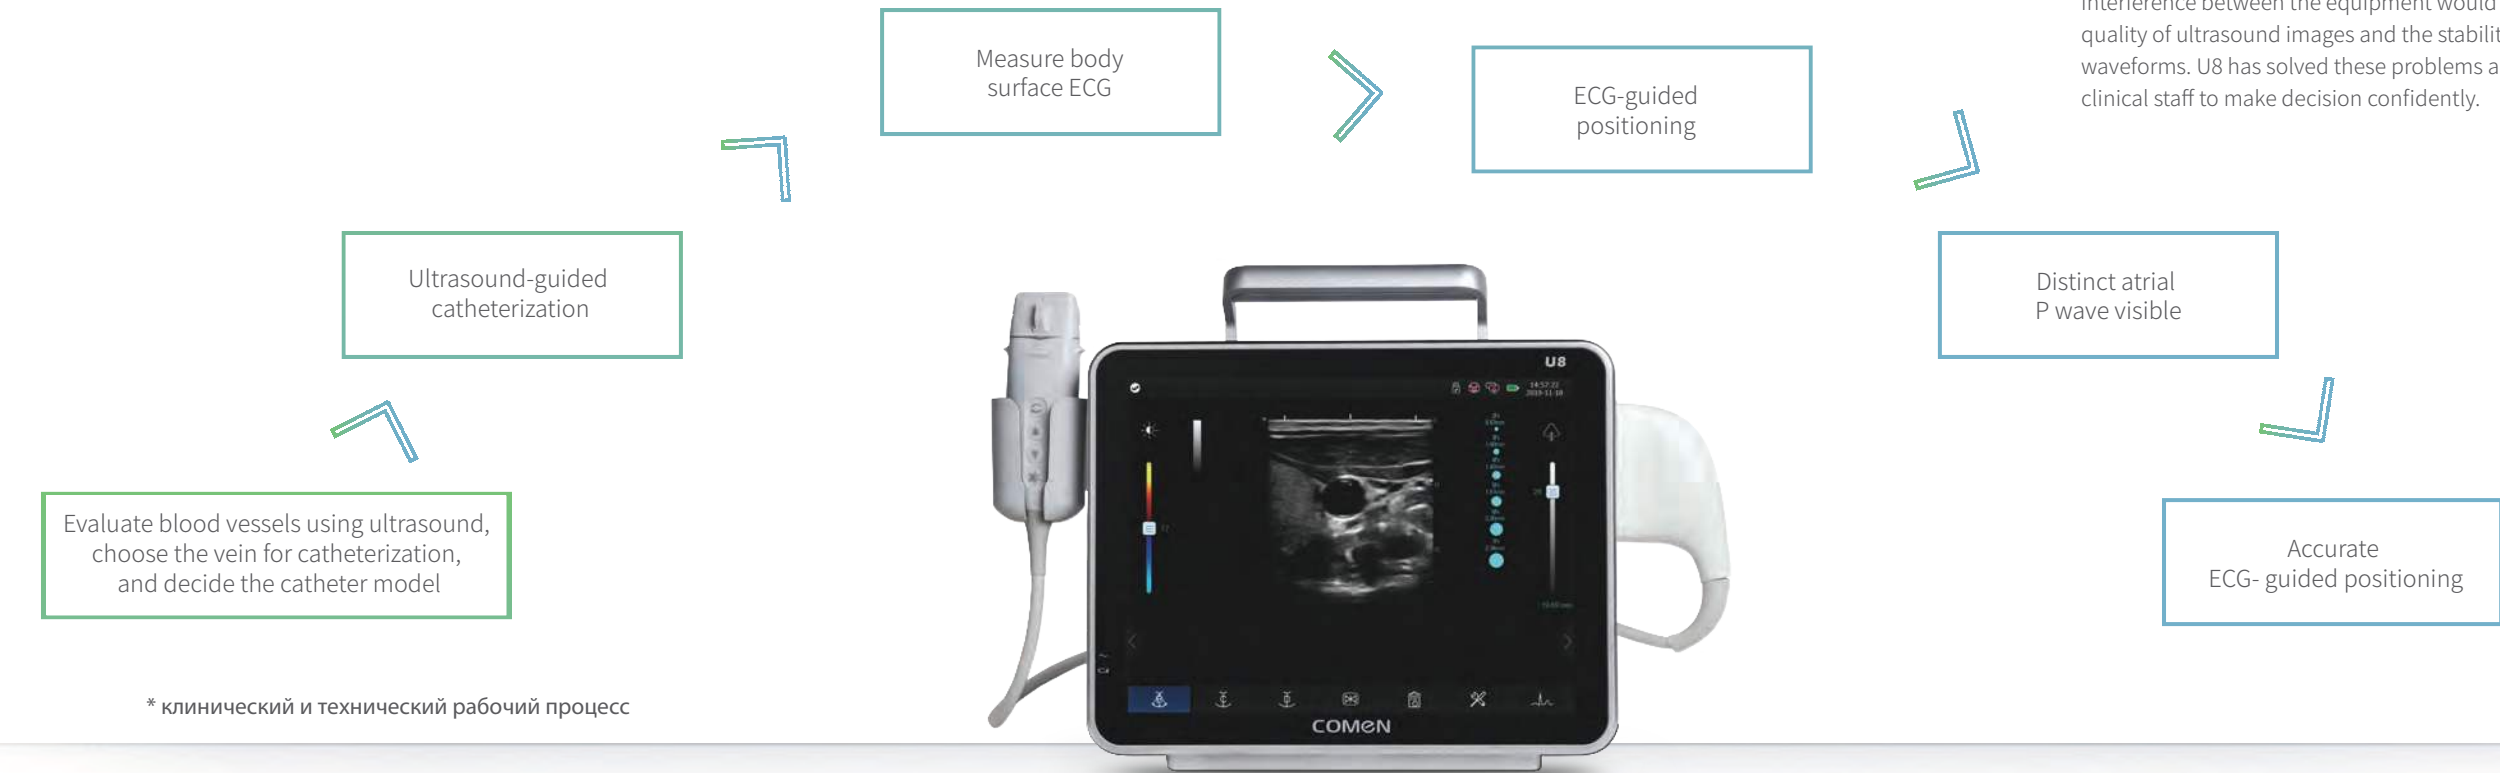

Traditional CVAD puncture and catheterization requires requires to use various devices, which occupies large space and involves complicated operation. Meanwhile, interference between the equipment would effect the quality of ultrasound images and the stability of ECG waveforms. U8 has solved these problems and helped clinical staff to make decision confidently.

* клинический и технический рабочий процесс

SCD600

Sequential Compression System

For preventing DVT and PE



Light and Comfortable

Flexible and efficient workflow, SCD600 features a light body and unique clip design for handy and intuitive control experience. All of this allows for greater flexibility and comfort for both clinicians and patients.



Powerful and intelligent

Focus on patients, providing personalized treatment. And with intelligent compression, dynamic and visualized treatment.

Accurate and reliable

Medical-grade dual pressure sensor features real-time pressure collection and provides double overpressure protection to ensure patient safety.
The Dual CPU processor gives real-time monitoring of the entire treatment process to ensure safe and reliable treatment.



Comprehensive NICU Solution



BQ80 Infant Radiant Warmer

New Neonatal Nursing and Rescue Platform

This is by far the most powerful 4 in1 neonatal nursing platform. The BQ80 integrates four key rescue and nursing systems to achieve one-stop operation and management. At the same time, it scientifically optimizes the workflow, helps medical staff to easily respond to urgent medical needs, effectively saves the valuable rescue time, and provides comprehensive and meticulous care for newborns.



Heating:

BQ80 applies far infrared ceramic heating tube for improving the radiation efficiency and extend the duration.

Resuscitation:

Built-in T-piece resuscitation provides safe and effective integrated asphyxia resuscitation and ventilation management including negative pressure sputum suction, positive pressure resuscitation, and oxygen therapy

Monitoring:

Built-in C31 specialized neonatal monitoring system is available for monitoring neonatal vital signs parameter, which can save the space and cost.

Phototherapy:

Canopy integrated jaundice treatment LED light for phototherapy, providing a soft blue light for the neonatal with jaundice.

Neonatal Incubator-B Series



B8/B6

B3


B2

Specialized Neonatal Monitoring System*

Specialized Neonatal Monitoring System customized for NICU by COMEN, including ExNeo® ECG technology, Adap- DSP® self-adapt NIBP technology, Masimo SPO₂, Apnea self- saving technology, and oxygen concentration detection function. And it is equipped with specialized neonatal accessories. It not only ensures the correctness of ECG collection and NIBP measurement, but also solves the problem of neonatal respiratory distress syndrome, this system was used in the world first specialized neonatal monitor - COMEN C60.



ExNeo®



Adap- DSP®



Masimo SET



Apnea self- saving

*Monitoring configurations may differ across the series.

For Babies, also for Caregivers

Designed to reduce environmental stimulation



Damping doors



<=0.1m/s air flow speed



Silent casters



Pressure-relief mattress



Electric bed tilting, easy for feeding



Tool-free 3 step disassembly


Temperature Control Technology

7 channels temperature collection to prevent overtemperature

The 7 built-in temperature sensors provides real-time air/skin/rectal temp monitoring. As a hedge against medical mishaps, temperatures for the heater, mattress, as well as the ambient environment are also monitored.

Dual symmetrical heater and symmetrical air circulation system

Warm air will be generated quickly and distributed evenly within the incubator.

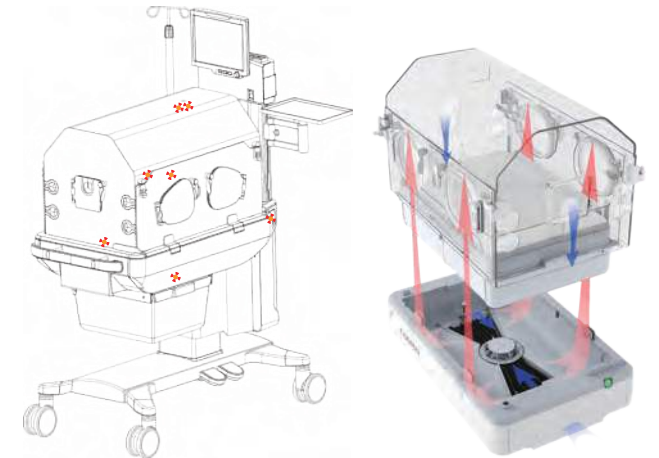

Humidity Control Technology

Efficient Humidity Control System

Maximum humidity setting: up to **99%**

Accuracy: **±5%**

Oxygen Control Technology

Servo Oxygen Supply and SpO₂ Monitoring

Closed-Loop Servo Oxygen Control supplements neonates with O₂ enrichment within the incubator through real-time feedback of Oxygen parameters.





BC-107/108 Infant Bassinet

Suitable for newborns and babies aged 0-5 months (or less than 70cm in length). The bassinet bed is made of ABS Eco-friendly material, waterproof and breathable, allowing your baby to grow up with peace of mind.

Safe and durable

The structure is stable and reliable. Even it is tilted to the maximum angle of 12, stable structure protects bassinet bed from falling.
The lifting/tilting lifespan is above the industry average, which means longer stability and safer operation.



Skin-friendly and comfortable

Suitable for newborns and babies aged 0-5 months (or less than 70cm in length).
The bassinet bed is made of ABS Eco-friendly material, waterproof and breathable, allowing your baby to grow up with peace of mind. Two types of mattress are available to choose. The mattress with waterproof cover is in compliance with biocompatibility standard.



Strong and trustworthy

To protect baby's safety, we use high-quality carbon steel for the bed frame, which is strong and deformation-resistance.

Clear vision

The transparent bedside walls provide mom a clear, easy view of baby, enabling eye contact. With well design and fine material, it is the best choice for baby care.

Meticulous design

The pressing handle allows the bassinet bed to be tilted at any angle between 0° to 12°, preventing regurgitating milk and reducing mom's worries.



Flexible height

Adjustable height is able to meet different nursing needs.

Convenience storage

Featuring large space, easy disinfection, the basket allows infant caring within reach.



Quiet and stable

Medical locking caster wheels enable baby to sleep soundly and sweetly even during transportation.



BL70 Infant Phototherapy Equipment



High-intensity irradiance

- Equipped with high-intensity LED cold light source, with less heat production, BL70 supports long-time treatment.
- With the maximal irradiance level of $63\mu\text{W}/\text{cm}^2/\text{nm}$, BL70 enhances the bilirubin breakdown ability and shortens the treatment time.
- With five levels irradiance adjustment, BL70 allows treatment tailored to each patient's need.

Precise Treatment for Neonatal Jaundice

Equipped with an irradiance probe to accurately measure the irradiance value and ensures that the baby receives enough irradiance, achieving precise treatment.



Irradiance probe

After clarification using irradiance probe, phototherapy irradiance value of 5 levels can be displayed on the screen.

Precise positioning

Using unique red light precise positioning, BL70 ensures correct position of the baby.



Ward round assistance

When doctor doing ward checking, it is unnecessary to take off the cover, and check neonates condition through the screen in real time.

Focus on Therapy, Applicable to Various Settings

- **Ultra compact** ---- Lightweight and portable, less space usage.
- **Large screen** ---- 4.3-inch color touch screen, easy to observe and operate.
- **Ultra quiet** ---- Fanless design, noise free, ensuring a quiet and comfort environment.
- **Various mounting solutions** ---- Convenient to move, seamless integration of different settings, including radiant warmer and baby cradle bed.
- **Quick-release structure** ---- The main unit can be quickly separated from the trolley and placed directly on the incubator hood.
- **Flexible adjustment** ---- Easy adjustment of height and angle.



P3/P6 Temperature control system



i-Servo™ Temperature Control System

P3/P6's intelligent closed-loop temperature control system automatically adjusts water temperature based on the monitored patient's core temp. The monitoring of the patient (both skin & core), water temperature ensures the safety throughout treatment, rewarming and maintenance while also avoiding other complications caused by long-term hypothermia. Quick access buttons on the side of the screen allows caregivers to easily switch between Hypothermia mode and Normothermia mode, tailored for versatility without the hassle when attending to patients' needs.

- Hypothermia Mode comes with an Intelligent Automatic Transition from Cooling-Maintenance treatment to Rewarming when Auto Mode is selected.
- Normothermia Mode is applicable during surgery to help patients maintain stable temperatures, tailored to best meet every unique surgical situation.



Hypothermia mode



Normothermia mode

More than just Cooling

Induction^①

Rapid cooling through the use of cooling blankets to reach a core body temperature of **33°C to 34°C** within **2 hours**. The P6 utilises innovative **Semiconductor Cooling Technology** to rapidly meet target temperatures.

Maintenance^①

Maintains newborns' core body temperature at **33.5°C to 34°C** for **72 hours**. Safety through **Real-Time Monitoring** to reduce the accidental occurrence of complications.

Rewarming^①

Recovers newborns core body temperature to **37°C** at **0.5°C/ 2 hours** with normothermia maintenance. The P6's exceptional **Intelligent Gradient Warming System** accommodates most clinical settings to provide Comfort and Ease of Access.

Round-the-clock Protection through Modular Monitoring

Unexpected complications in newborns receiving therapeutic hypothermia can be overwhelming and stressful due to the influence it has on their cardiopulmonary system, which is why, to lighten caregivers' load, we provide constant monitoring of vital signs to ensure that nothing goes unnoticed.



①: Seetha Shankaran . Therapeutic Hypothermia for Neonatal Encephalopathy 2013 Dec 1. Curr Treat Options Neurol. 2012 Dec; 14(6): 608 – 619.



BQ70

T-piece Infant Resuscitation System


The T-piece Infant Resuscitation System is designed to establish a clear airway, delivering oxygen or air/oxygen mixtures required by resuscitation of infants.

3 functions into 1

Full integration of suction, resuscitation and O₂ therapy, meeting the latest NRP guidelines (Neonatal Resuscitation Program). It simplifies the operation by making set-up easy and care area space-saving.

Movability within reach

Bringing life-saving capacity to anywhere within hospital by virtue of its light weight and handle design. A trolley is supported to enhance the portability.

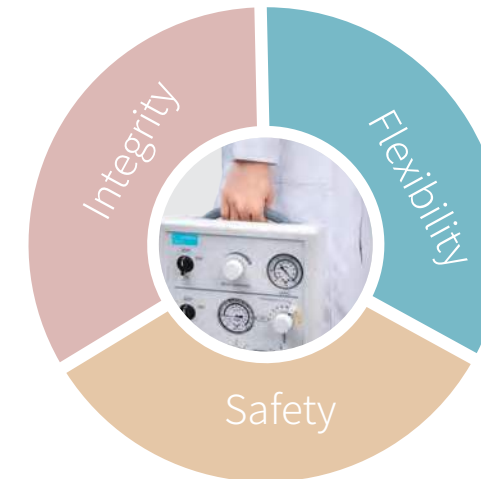

Pressure relief valve at the gas inlet

Membrane safety valve 1

4-channel pressure control

Reliable internal mechanical design, reducing the possibility of overpressure

Pressure reducer

Membrane safety valve 2

Easy Operation

Vaccum switch

Safety stop for pressure protection

T-piece operating switch

Pressure monitoring

Built-in O₂/Air blender




NV9 Neonatal Ventilator

The Epitome of Neonatal Non-invasive Ventilation

- NCPAP+apnea wakeup function
- SNIPPV+backup ventilation
- One button for fast oxygen ventilation
- NIPPV
- HFNC+pressure monitoring function
- Manual ventilation

Exceptional apnea wakeup function : apnea monitoring and alarm function, providing positive airway pressure to lower the risk of neonatal apnea.

iFlow Intelligent Closed-loop Control System

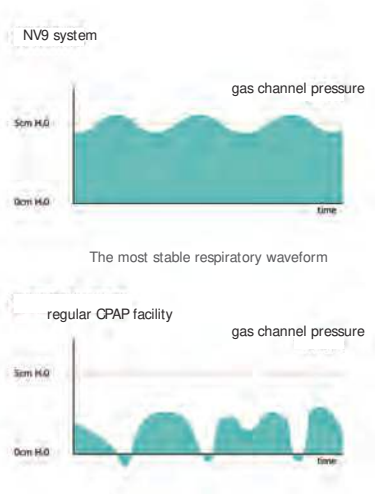

Fast and simple pressure setting : easy to setting the pressure through touch screen in one step.

Coanda-effect pressure generator : Provding stable pressure to settle neonate' s weak resilience, and near the nose monitoring is more accurate and read.

Real-time leakage compensation : iFlow system can automatically compensate leakage to guarantee ventilation treatment efficiency.

O2 Concentration Control System

Fast and easy Fio₂ setting : adopt electronic control of air-oxygen blending to directly set Fio₂, more precise and accurate.

Accurate O₂ concentration monitoring : CITY O₂ concentration sensor, short react time and instant monitoring.

One key calibration : one key to calibrate the O₂ concentration, automatically success after a moment.

SpO₂ Monitoring : NV9 is configured with Masimo/Nellcor SpO₂. The effect of non-invasive ventilation is judged by the changes of SpO₂.



KL-20 Medical Air / Oxygen Blender

An independent gas mixer receiving separate oxygen source and air source, and delivering mixed gas with adjustable oxygen concentration and volume; Incorporate humidifier and oxygen tube/pressure generator into oxygen apparatus/CPAP machine.





NV6 Neonatal Ventilator

Bubble CPAP not only provides CPAP ventilation therapy, but also it is unique care for patients lies in that the high frequency vibration bubble makes the airflow of entering into patient' s respiratory system produce high frequency oscillation, so that it gives a quick tap for the lung of patient, hence to improve the respiratory function, reduce the amount of dead space, advance expectoration and speed recovery. With HFNC high flow O₂ therapy, NV6 is easier to use and able to aviod damage to the patients.

VS-20 Pure And Ultra-quiet

VS-20 applies high-effective filtering technology to provide pure compressed air.

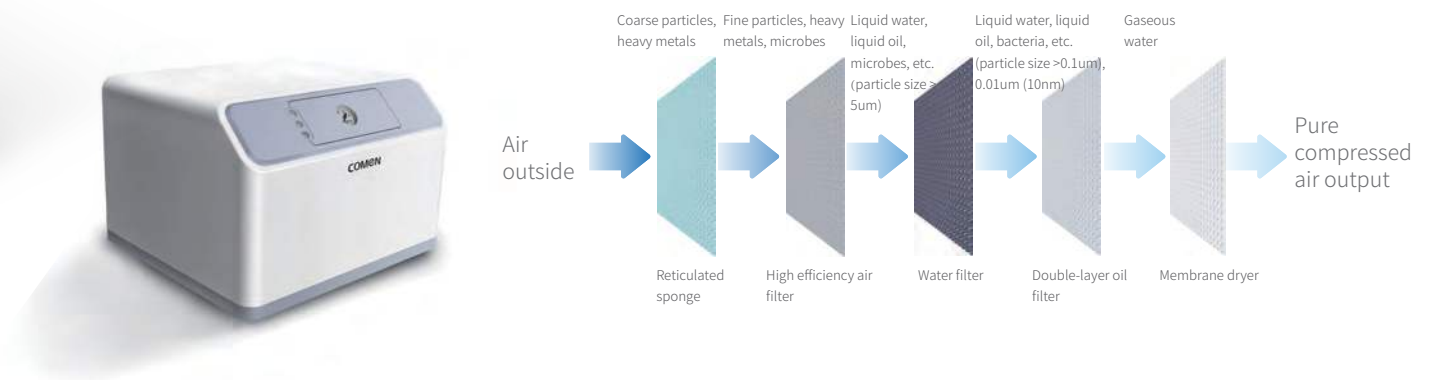

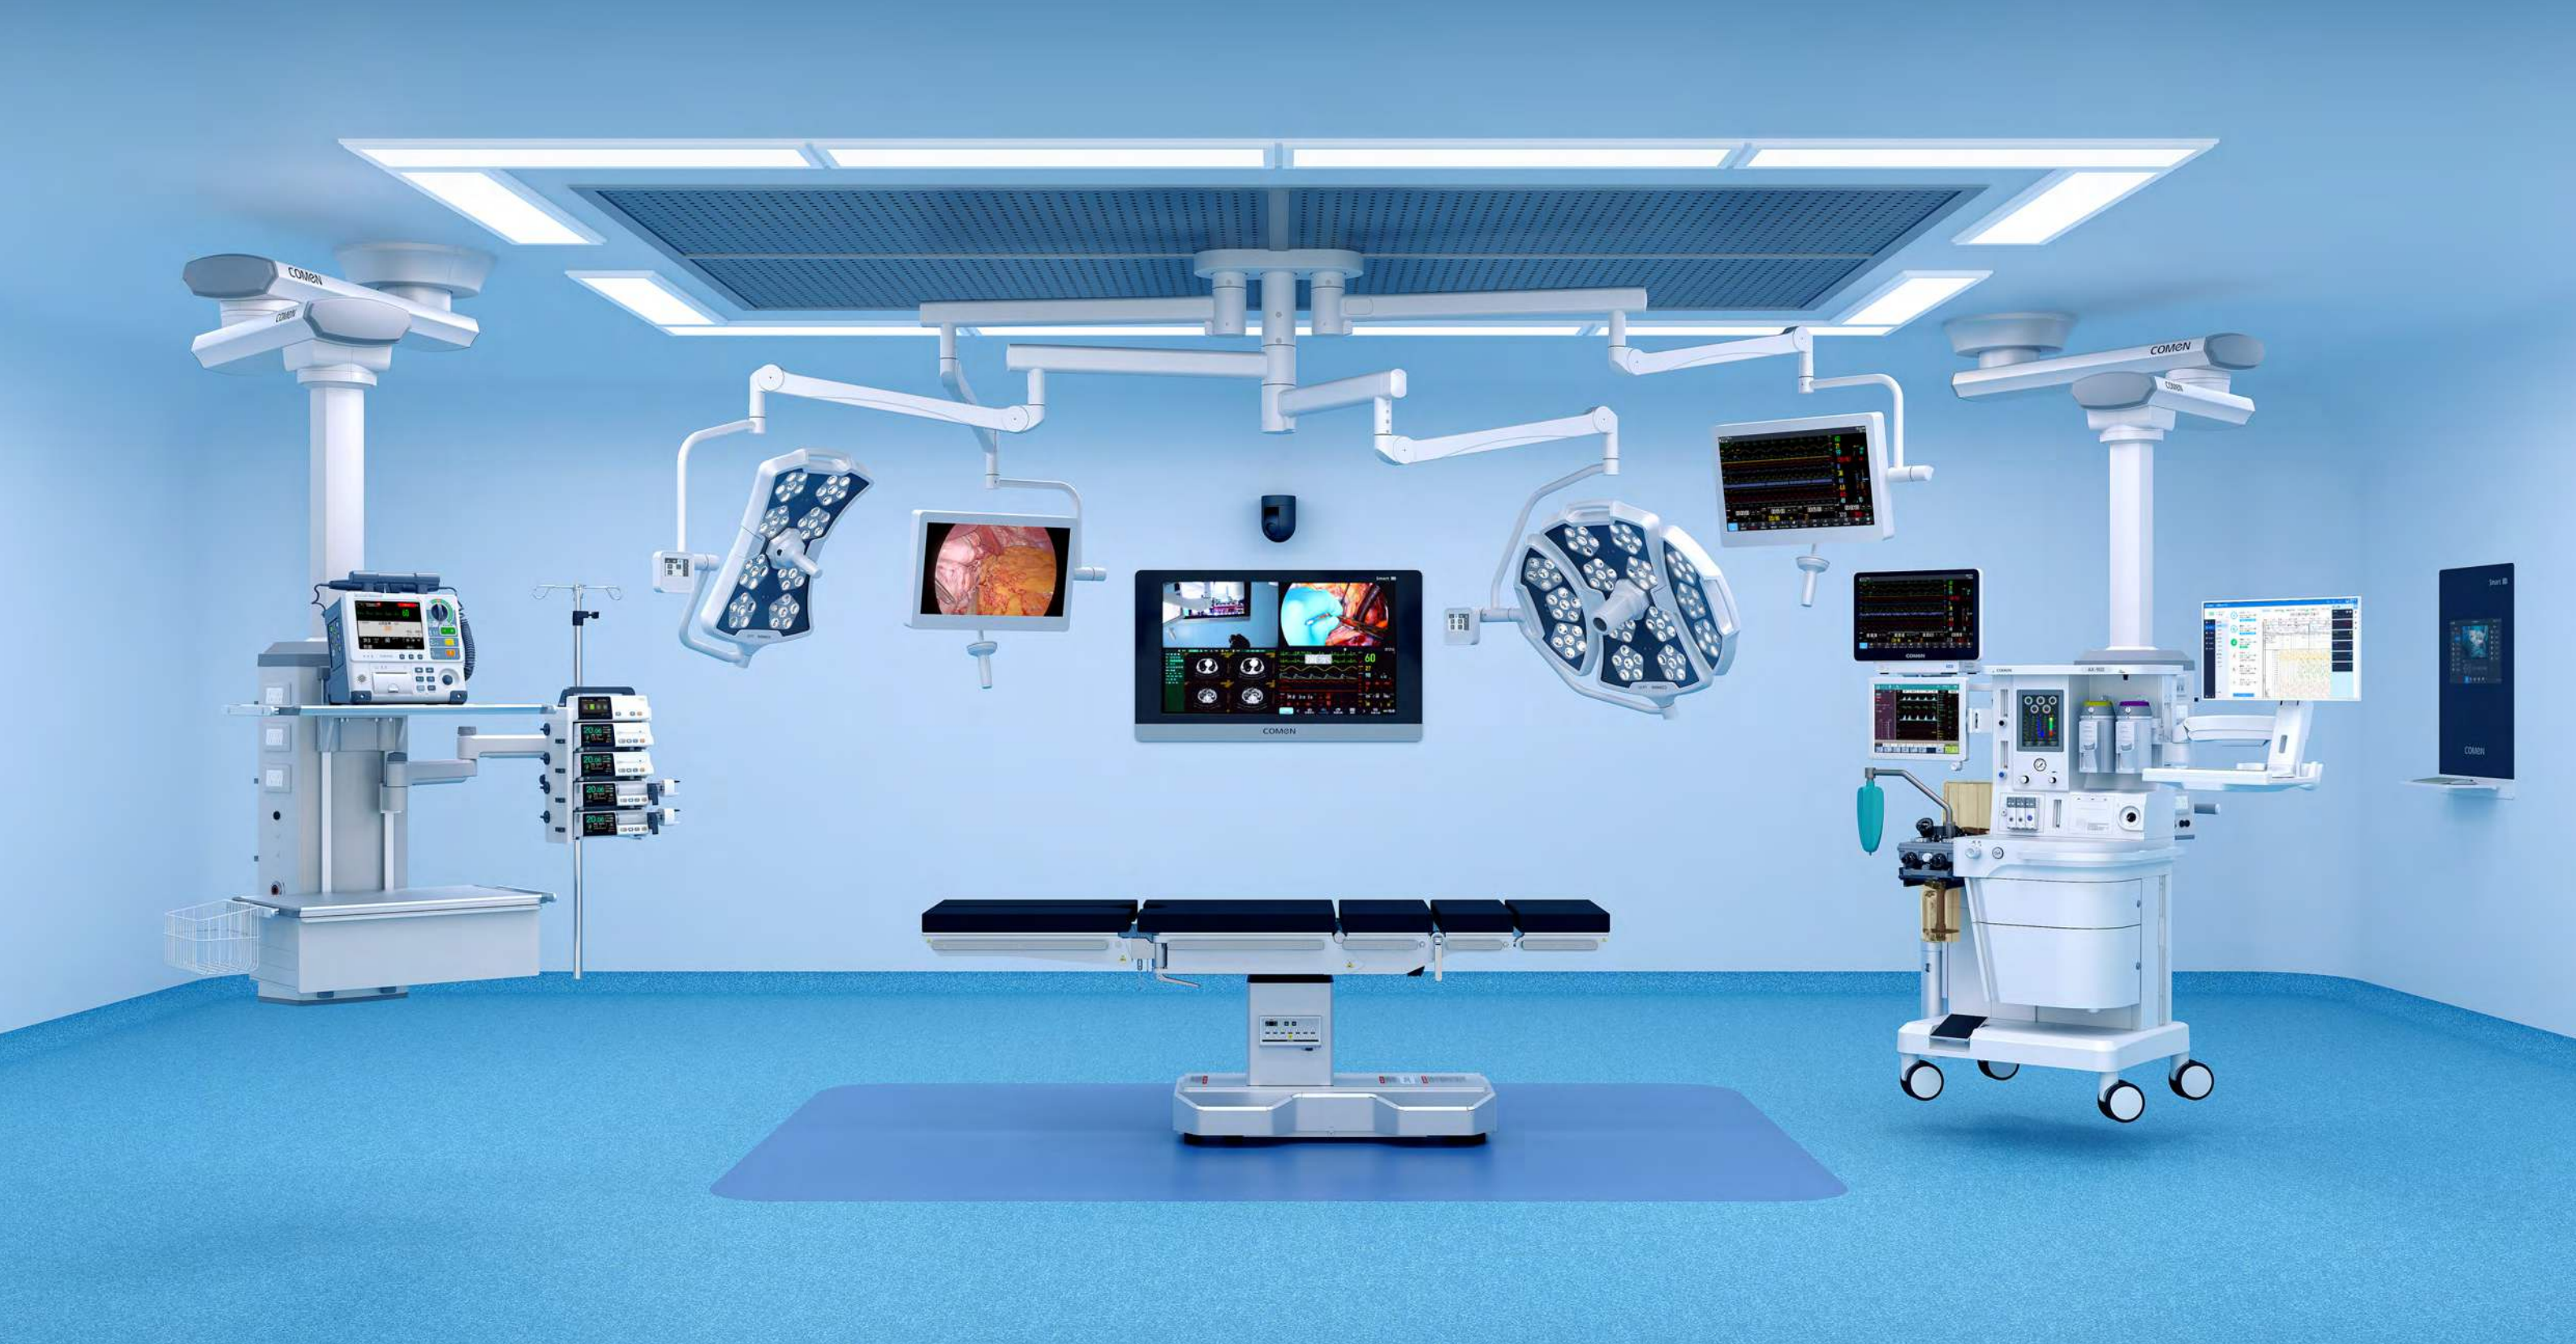

Comprehensive OR/ICU Solution

Defibrillator Monitor

S8



S5



Comprehensive operation modes

Defibrillation

Manual defibrillation modes include synchronous cardioversion and asynchronous defibrillation.

AED

The model applies patented analysis algorithm and automated analysis as well as convenient setting to guide clinical emergency personnel in providing defibrillation and basic life support.

4 in 1

Pacing

Having on-demand pacing and fixed pacing mode, for patients with cardiac arrest and acute severe slow arrhythmia, in vitro non-invasive pacing mode is rapid, easy to master, time-saving and improve recovery success rate.

Monitor

12/5-lead ECG monitoring as standard, optional monitoring functions include SpO2, NIBP, PR and EtCO2 are also available for continuous monitoring of patient vital signs.

Advanced BTE Technology

Higher efficiency with Advanced Biphasic Truncated Exponential (BTE) waveform technology and automatic impedance compensation.

Up to 360J energy selection, for patients with high defibrillation thresholds such as myocardial infarction, obesity, high impedance, higher energy selection indicates greater defibrillation success rate.



Fast Defibrillation

1 knob

Mode can be switched among manual defibrillation, pacing and AED. In manual defibrillation, the user can complete the energy selection within 1 second.

3s

Defibrillator charge to 200J and shock in 3 seconds, rescue time is guaranteed fully.

3 steps

Fulfill defibrillating operation (Energy selection – Charging – Discharging).



V3 Ventilator



Extensive Respiratory Management

V3 has a comprehensive range of ventilation modes and special features that meet the requirements of intensive care respiratory therapy.

It fully supports the various treatment needs of ICU, PACU, RICU, EICU, PICU and other wards.

Ventilation modes:	Invasive ventilation mode	• V- A/C	• V- SIMV		Non-invasive ventilation mode	• P- A/C	• P- SIMV
		• P- A/C	• P- SIMV			• CPAP/PSV	• High flow oxygen therapy
Respiratory Respiration Assisting tools:	Assisted ventilation	• Manual breathing	• Exhalation- hold	• Inhalation- hold	Smart ventilation	• Compliance compensation	• Leakage compensation
		• Nebulizer	• Oxygen enrichment (+O ₂)	• Sputum suction		• IntelliSynTec	• Apnea ventilation mode
Monitoring function:	Waveform monitoring	• P- T waveform	• F- T waveform	• V- T waveform			• Wavefrom chart
		• P- V loop	• F- V loop	• F- P loop			• Wavefrom chart



Patient type



Waveform measurement tool



Automatic alarm limit

Benefit from the intuitive UI design of V3, it only takes two steps to adjust ventilation parameters. The functional layout is clinically applicable, and what you think is what you get.

Easy to Use

The V3 screen can be flipped freely to the best viewing angle. For the most comfortable operating experience.




V1 Ventilator



Advanced Tools ICU-grade support

Most Comprehensive Ventilation Mode.

V1 provides same ventilation mode as ICU ventilators. It becomes more adaptive to multi-types of patient. Which result in an efficient tool that makes different during transport.

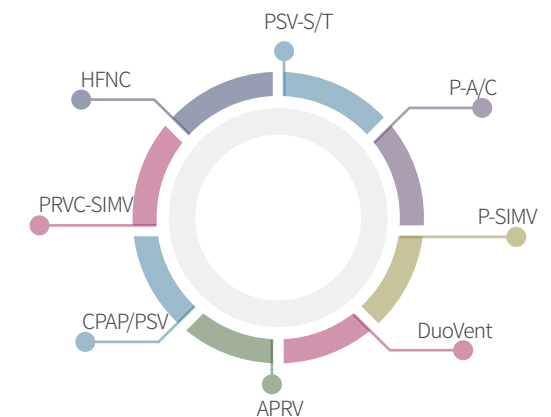


42+ Parameters

Monitoring parameters provides immediate feedbacks which makes decision faster.



PulmoView

The PulmoView function is an animated lung that shows compliance, patient trigger and resistance in real time.

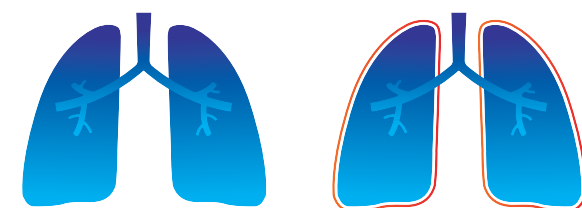


More Efficient Algorithm.

The IntelliSynTec algorithm enables smooth synchronization which increase the comfort of patient.

【Auto】Expiratory Trigger

- Comfort the patient in breathing
- Improve the man-machine synchronization
- Reduce the frequency of ventilator adjustment

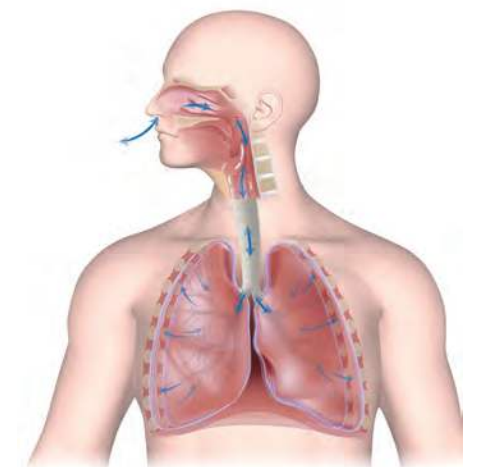

High-performance Turbine

The integrated high-performance turbine provides pneumatic performance that can match any compressed-airbased ICU ventilator. The built-in power unit can not only generate higher pressure but also support continuous O2 concentration.

NF5

High Flow Heated Respiratory Humidifier



Simple and practical

- Ultra- Large touch screen: NF5 is equipped with a 4.3- inch touch screen, which allows easy and quick operation by touch and navigation knob.
- Electronic Air- O₂ mixer system: easy to set up flow rate and O₂ concentration.
- Intuitive UI design: large font, easy for caregiver to operate and observe.



Intra- hospital transport

- High performance turbine, no need for compressed air supply
- Integrated battery for transportation
- Light and compact medical trolley ease intra- hospital transport

Safe and comfortable



- Multi- position temp monitoring: NF5 is equipped with 3 temp sensors, which enable real-time temp monitoring, synchronized closed- loop feedback, joint high temp alarm, smart water level management and over- temp protection function to ensure safer heating.
- High- performance nasal cannula: ergonomic design, soft and comfortable, free of constriction.
- Ultra- quiet design: The ultra- quiet turbine significantly reduces noise, provides a quiet O₂ therapy environment, reduces irritability.

SpO₂ monitoring

- Optional Comen, Masimo or Nellcor SpO₂ monitoring function, real- time monitoring of the patient's O₂ concentration, ease evaluation of the effectiveness of high- flow O₂ therapy, so that doctors can optimize the treatment plan in real time.



CVL series Video Laryngoscope



CVL series provide two video laryngoscope types depending on the characteristics of the airway:

- Specialized blades CVL-2 designed specifically with a curvature and length intended for children, fit perfectly for A child's airway.
- Unique blades for adults CVL-3 was designed for adult patients with difficult airways, ensuring unobstructed vision for doctors during intubation, reducing the risk of complications.



HD Display

The 3" screen supports high resolution up to 640*480.

Free Rotation

The screen can be horizontal rotated 270 ° and vertical rotated 180 ° to adapt to different angles of use.

Ergonomic Design

The blade adopts ergonomic design and specialized curvature to easily fit different airways.



Excellent View

CVL series is equipped with HD CMOS camera which provides high resolution up to 1-megapixel. Anti-fog treatment which provide clear view at every angle.



AX-900 Anesthesia Machine

Screen

- 15-inch four-way rotating touch screen for doctors of different heights carrying out observation and operation at different posture; improve doctor comfort and reduce work fatigue.
- Reasonable partitions of configuration parameters and monitoring parameters; all the observations and operations can be completed within 2-level menu.
- 8-inch independent control screen is adopted in the electronic flow control system, making it clear and handy to use.
- Bookmark menu, simple and clear-cut
- Self-explanatory and easy to use

Full electronic flow control system

- Full electronic flow control system
- Fully electronically controlled fresh gas flow greatly improves accuracy of flow and oxygen concentration.
- Closed-loop oxygen concentration control technology: The user directly configures the oxygen concentration and total volume of flow. The system automatically matches the ratio and dynamically calibrates it in real time.
- Best flow indicator tool: scientifically guide the clinical implementation of low-flow anesthesia while saving costs.
- Fully electronic gas source control system: electronic monitoring of gas source pressure; once there is overpressure or underpressure, the electronic system would respond quickly.
- Negative pressure expectoration system: no need of negative pressure source; the equipment is converted to negative pressure through the Venturi effect and positive air pressure, and the flow can be adjusted independently.
- A brand new auxiliary oxygen supply system: support off-line operation; fast oxygen therapy; can produce gas of any volume of oxygen concentration.
- The high pressure oxygen source can support the rescue ventilator.



Breathing circuit

- Compact and integrated design with circuit leakage volume of less than 65ml/min
- Improve the safety and convenience of system use
- Made of PPSU material; corrosion resistant; long service life; can withstand temperature as high as 134°C
- High temperature and high pressure steam sterilization
- Easy to disassemble and clean, and has less maintenance time
- Built-in heater eliminates internal condensation effectively
- Bypass function for easy replacement of soda lime absorption tanks during operation
- With semi-open, semi-closed double breathing circuit, can be equipped with Bain, T and so on. Open ventilation.

The minimum tidal volume down to **5ml** under PCV mode

7% high accuracy ventilation

Breathing circuit leakage as low as **65ml/min**



AX-800
Anesthesia Machine



AX-500
Anesthesia Machine



AX-600
Anesthesia Machine



AGSS - L
Anaesthesia Gas Scavenging system

Doctors and nurses protect the health of patients,
COMEN care for doctors and nurses



A7
Anesthesia Machine

Ergonomic Operation Platform

- 8.4-inch touch screen displays up to five waveforms simultaneously.
- Three-drawer design provides caregivers with a larger medical accessories storage space.
- 0-15 l/min Dual-channel mechanical flowmeter allows a wider flow adjustment
- Three-slot modular design supports AG+O, AG, BIS, CO, NMT, high-end parameters monitoring.
- A7 is integrated with advanced auxiliary tools to satisfy different clinical demands. : Flush O2, ACGO, AGSS etc.


Compact & Precise Breathing Circuit

- The highly integrated breathing circuit design reduces the air resistance of the breathing circuit effectively.
- The APL valve exhausts quickly the pressure to the lowest value, making the operation more efficient!
- With by-pass technology, the CO2 canister can be changed during the operation without leakage problems.



Comprehensive Ventilation Support

Various ventilation modes satisfy different clinical demands during the perioperation, and provide patients with comfortable, safe and efficient ventilation support.

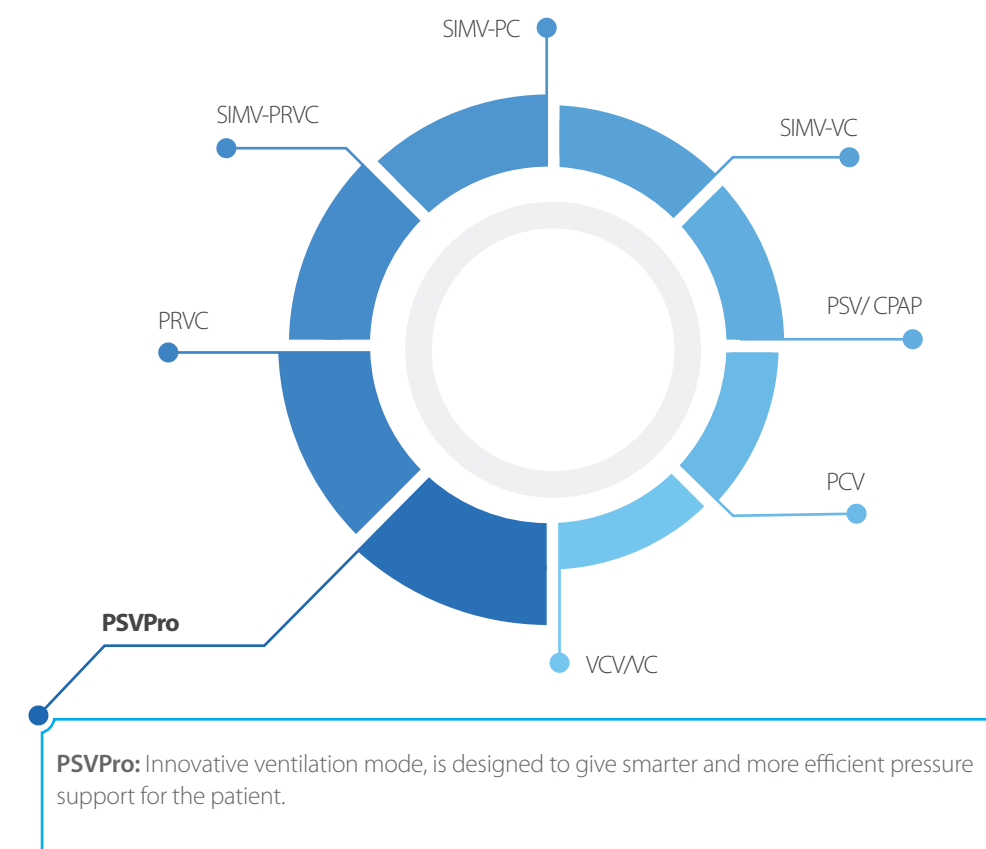



L5 Surgical Light

The new generation outstanding surgical light

Powerful independent working function

- Lamps' Lifespan up to 70,000 hours, , more durable than ever
- Central Illumination: 160,000 lux/120,000 lux, 3 modes meet various of surgery requirements
- Max. depth of Illumination : 1,300 mm
- Lower power consumption

Unique Function


- **Illumination automatic adaptation technology**
25cm up/down movement of the surgical lamp will no change the illumination under the specified illuminance
- **Illumination stabilization technology**
L5 adopts DC dimming technology, that means it can protect the surgeon' s eyes from the flickers of the traditional PWM dimming, what' s more, it will no cause the waves during filming
- **Illumination capacity technology**
Spot size will not change while the illuminance was changing, to make it more convenient for medical staff operation.
- **Customized configuration**
L5 has 3 custom configurations, surgeons can customize the parameter setup of illumination, spot size, etc. according to the needs and preferences themselves

L3 Surgical Light

Powerful and Economical surgical light

- The Ra of L3 is up to 98, which provides you a truest color of surgical wound
- Lamp lifespan is up to 70,000 hours, more durable than ever
- Double endoscopy modes, green and white light optional, more comfortable for doctors' eyes



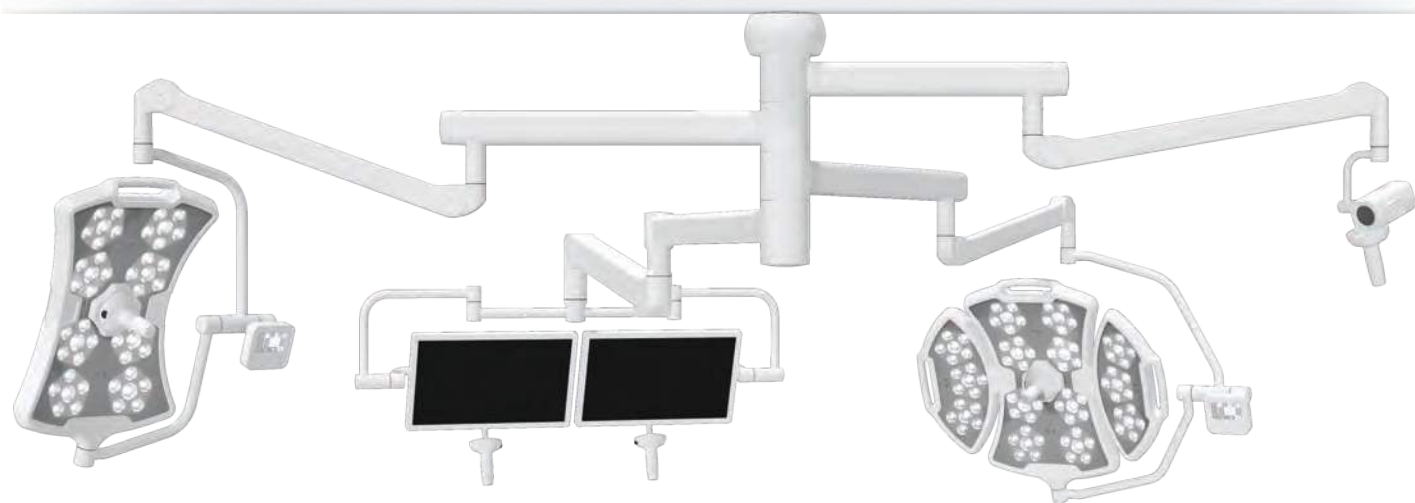

L6 LED Surgical Light

Mixed light function: Mixed with multicolor spectrum, L6 surgical light guarantees a perfect visualization on the surface as well as in deep cavities with very pure white light.

Thanks to optical engine technology, L6 surgical light provide consistent white light through mixing multiple color light and stable color temperature irrespective of blocking of the light.

An efficient illumination without spotlight

Endoscopy surgery lighting technology

Unparalleled shadow management

Extraordinary 7 performances ranking high level in the world

Center Luminance(lx)

Irradiance (mW/m2.lx)

Light depth

Shadowless rate

Color temperature (K)

Color rendering index (CRI) (Ra)

R9



The back panel is arc surface with hollow out design to prevent from dust and assist airflow in the laminar flow.

Design and craftwork:

Designed with elements of ancient knife, butterfly and plum, L6 surgical light offers state-of-the-art feeling for medical staffs while using it.

L6 giving out cold light as if it is the sunshine, showing harmonious beauty among nature, technique and human, delivering peace and gentle, creating some nervous and solemn atmosphere in OR for conducting the surgery and for intensive life care.

Intelligent assembling method allows surgeons free from adjustment so as to focus on his work.



LED light source, **50000h** long service life



W5 Operating Table

Wide Rotational Angles & Multiple Accessories Choices

The COMEN W5 boasts the widest range of rotational angles, allowing for more precise patient orientation and positioning. With a wide array of available accessories and postural pads, the W5 can support orthopedic, cardiovascular, extradural, spinal, facial features, liver and kidney, urinary and other operations.



Laparoscopic surgery



Thyroid surgery



Column stabilization



Shoulder surgery



Shoulder surgery in beach chair position




Lithotomic surgery

Ergonomic Design

- The modular design of the W5 satisfies a variety of clinical demands and special posture requirements under different surgical settings.
- Both the wired controller and the control panel on the table are always on standby
- Unique Pipeline Manager organizes effectively the wires or tubing connected to monitors or anesthesia machines.
- 60mm Antistatic Memory Mattress can avoid pressure sores during the surgical operation.



Hip surgery with traction device in carbon fibre

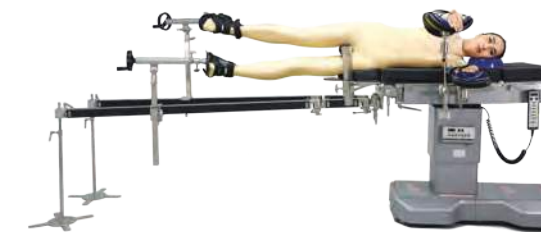

Femur surgery



M6 Ceiling Pendant



M8 Ceiling Beam

Space utilization

Optimized space utilization: The frame-type box structure allows for significant space savings. As shown in the picture, space is still available at both sides of the operating table while ECMO, CRRT, ventilator, monitor and syringe pump are simultaneously loaded. The box does not occupy the prime nursing area (the two sides of the operating table where the patient's arms are placed), supporting critical care.

Modular design

- Expand the possibilities
- Support subsequent upgrades
- More convenient maintenance
- Independent functioning of modules, more reliable quality, avoiding interference between multiple functions
- On-site adjustment of terminal order and terminal position according to user habits
- Power and air supply separation:
Real power and air supply separation design, the power and air supply are distributed in two different boxes with independent wiring, eliminating fire hazards from the root
- Lightweight design, making the pendant lighter; smooth pushing and pulling, stable braking

Load-bearing capacity

Scientific load-bearing capacity: a change from the tradition, the actual carrying capacity of the prototype is measured after the design is completed. Comen M series ceiling pendant uses an advanced FEM CAE system, to analyze the physical and mechanical properties of the product structure with the aid of discretization design, as well as to predict, evaluate and optimize the bearing capacity. At the same time, it is combined with the actual measurement of the prototype to verify each other.

This rigorous R&D system not only measures the basic performance of the new machine, but also simulates the load-bearing performance of the equipment after years of ageing. The quality and stability of the product throughout its life cycle is scientifically guaranteed.



D8 Ceiling Pendant



D5 Ceiling Pendant



D9 Ceiling Pendant



- Adopting complex porthole die technology on the arm; Profile section's thickness is up to 17.68mm; Tensile strength is 285N/mm²; Yield strength is 234N/mm²; Passed strict maximum loading test(2.72ton).



- Switzerland SKF high strength bearings, with quiet, smooth running and long-term reliability advantages. Service life of the bearing About 10000-250000 hours



- Combining with the SKF lifting technology from Switzerland;. Its lifting mechanism can bear heavy load and support lifting distance working, enabling free and easy movement with direction orientation function in the driving system.



- Use AL6061 aluminum, better performance with the oxidation protection treatment on the surface. Air source terminal passed plug durability test(30000 times). Passed strict pressure test



- The engineer fully considerate the structure while designing the performance of the cabinet. Cable management and storage tank design make it more compact. The interfaces of the gas sources and power supply is designed to maximize the space utilization.



- Drag chain design to prevent air leakage caused by gas circuit turning and short circuit caused by cable damage. Double bearing and double track design enable more stable of translation. The reading lamp was designed for enable patients to read in the evening, no influence to other patients. Multi-color backlight design help meet with patients of different backlight color preference.

M300/500 Syringe Pump




Multi-CPU monitoring High precision injection

CPU matrix

M300 adopts multiple CPUs to monitor each other and form a coordinated alarm system to ensure the safety of injection and prevent accidents.

High-performance motor

The high-performance stepper motor and transmission system allow the M300 to inject without generating pulse waves even at low speeds.

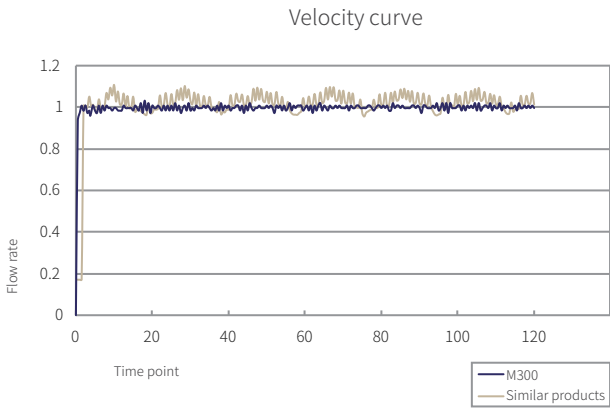

Professional & convenient




Extensive drug library

M500 provides a library of 2100 drugs and is customizable for new entries, giving medical personnel essential drug options for infusion records to ensure medication safety.



Continuous titration

The infusion parameters setting can be changed without stopping it.



Dual-channel cascade

The dual-channel design provides a relay mode that not only allows for simultaneous injection of multiple drugs, but also cascade administration of the same drug to achieve continuous drug infusion. The maximum continuous single infusion is 120 ml of drug solution.



Multiple working modes

Features rate mode, time mode, weight mode, interval mode, trapezia mode, sequence mode, micro mode, TIVA mode, loading dose mode and night mode, which meet a variety of clinical needs and matched well with other ICU equipment.

ME600 Infusion Pump



Continuous innovation

- Sophisticated motor and dual detectors guarantee precision and stability
- Intelligent pulse compensation technology
- Intelligent heating technology
- Bubble detection technology
- Patented anti- bolus system

Infusion Workstation System Syringe Pump / Infusion Pump

MX8900/M800/ME900



Flexible Combination, Various Applications

The modular, plug-and-play design brings the greatest flexibility of combination for various infusion scenarios, with expansion of slots from 2-24 infusion pumps.



Wards


Transfer

NICU


ICU/OR




Main controller
Easier operation by centralized management



Slave controller
Receives order from main controller, and provides one-cord charging



Portable Handle
Allows to be carried by hand

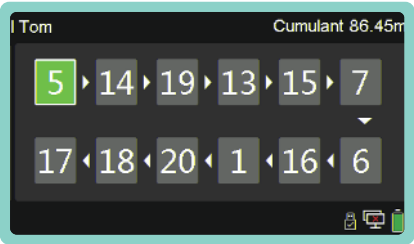

Seamless Multi-channel Relay

The user-defined sequence portfolios (S1-S12), realizes auto multi-channel relay in order. Sequences are able to be activated synchronously, allowing different drugs delivery at the same time.



One-stop Management


Support collective calculation of total volume.
Support occlusion pressure, bubble size, accumulative bubble alarm unified setting.
Support nurse call and file export.



Tool-free mounting and auto-lock



One power cord for charging

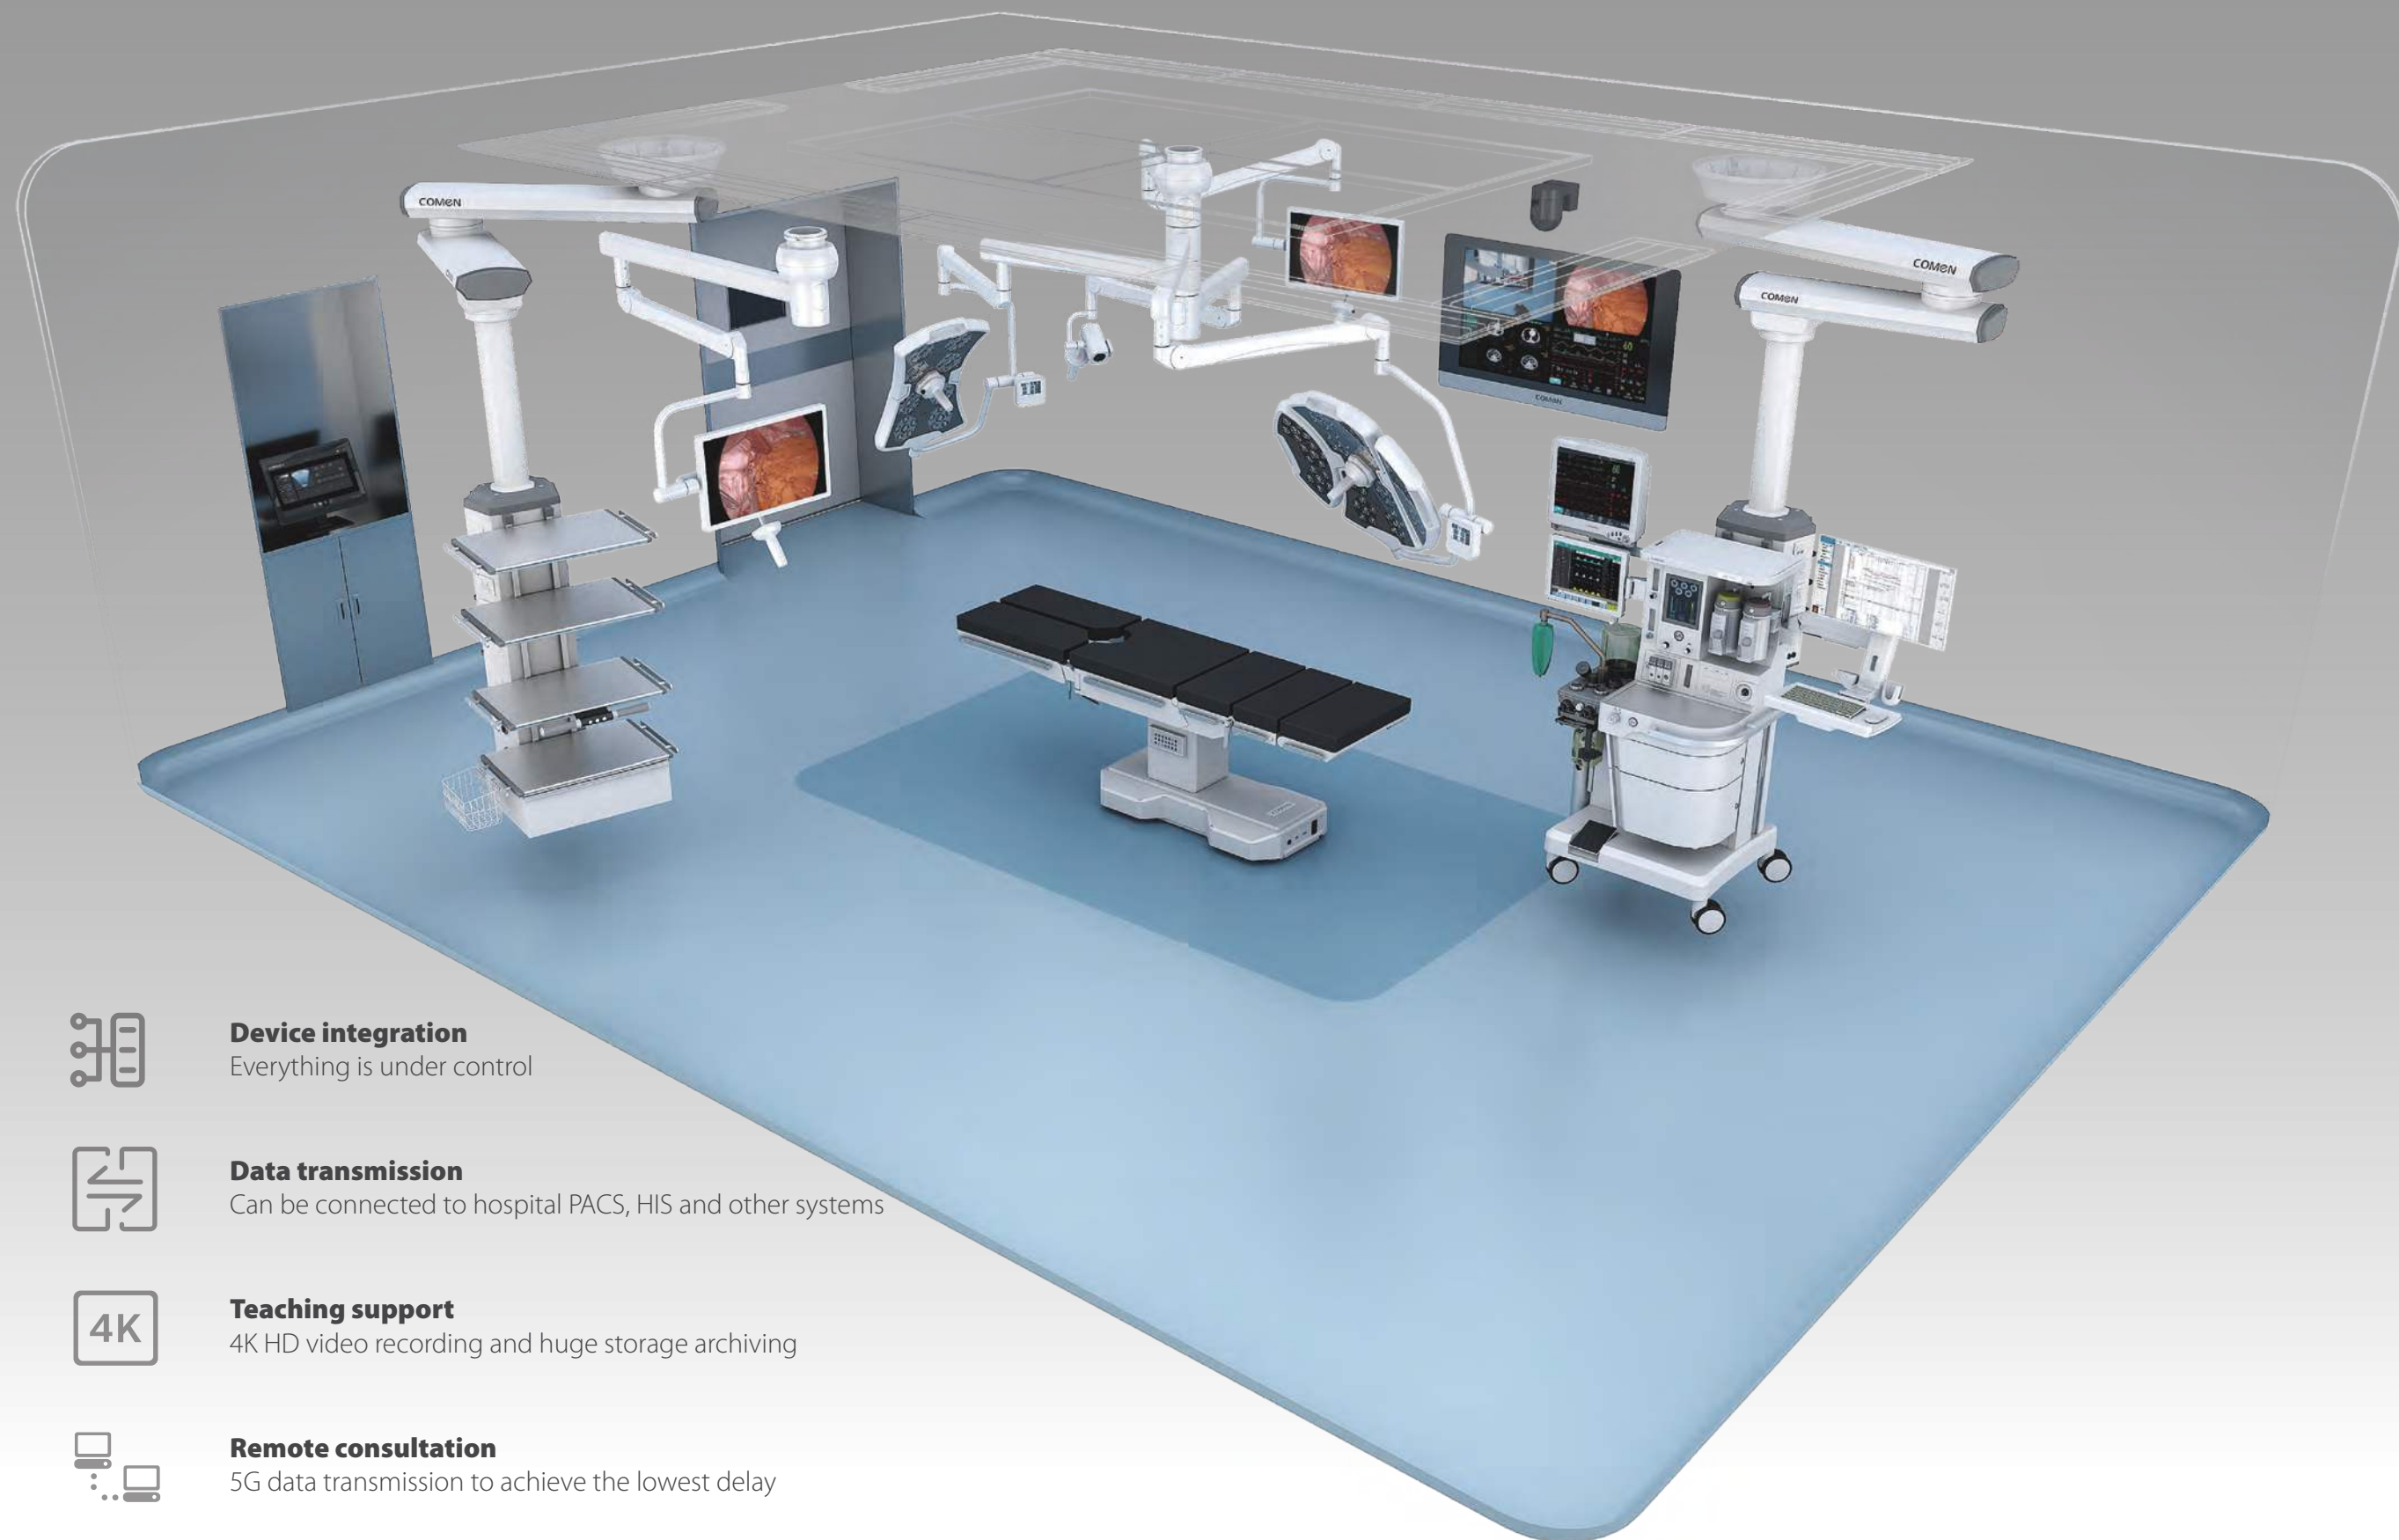

Device integration
Everything is under control



Data transmission
Can be connected to hospital PACS, HIS and other systems



Teaching support
4K HD video recording and huge storage archiving



Remote consultation
5G data transmission to achieve the lowest delay